

QUALTECH



# HYBRID PRE-PRESS TABLE

OUR VERSATILE HIGH PERFORMANCE UNIT CAN BE CONVERTED FROM A DRAIN TABLE TO A PRE-PRESS TABLE AND FINALLY INTO A FINISHING TABLE

Simple and effective, it offers an excellent price/capacity ratio


- > Sanitary 304 stainless steel construction for easy cleaning
- > Bilateral sloped bottom and central whey drain
- > Sanitary design meets food industry standards
- > Mounted on casters for maneuverability and ease of movement
- > Configurable for finishing and/or pre-pressing mode via additional equipment



24/7  
EMERGENCY  
SERVICE  
1-888-339-3801

INFO@QUALTECH.CA  
QUALTECH.CA

# SPECIFICATIONS

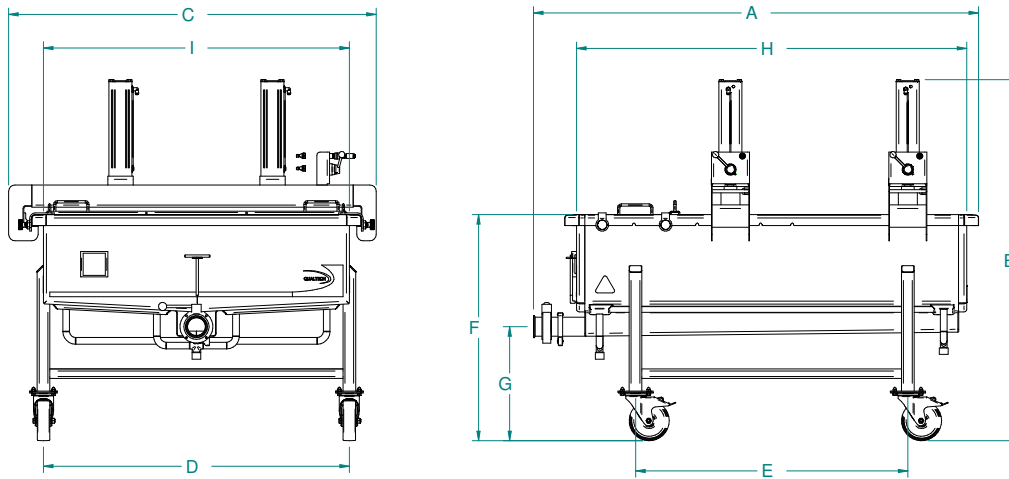

MODEL	CURD VAT CAPACITY [L]	A [in]	B [in]	C [in]	D [in]	E [in]	F [in]	G [in]	H [in]	I [in]
TPPH01-12 + pp	1200	58 1/4	57	58	48 5/16	34	35 11/16	18	49 3/8	48
TPPH01-15 + pp	1500	70 1/4	57	58	48 5/16	43	35 11/16	18	61 3/8	48
TPPH01-20 + pp	2000	90 1/4	57	58	48 5/16	53	35 11/16	18	81 3/8	48
TPPH01-25 + pp	2500	110 1/4	57	58	48 5/16	68	35 11/16	18	101 3/8	48
TPPH01-30 + pp	3000	130 1/4	57	58	48 5/16	115 5/8	35 11/16	18	121 3/8	48
TPPH01-30 + Agit.	3000	162 7/16	57	58	48 5/16	115 5/8	35 11/16	18	121 3/8	48

TPPH01	Possible configurations	12	15	20	25	30	Code	(a)
<b>Curd Vat Capacity (L)</b>		1200	1500	2000	2500	3000		
<b>Finishing Table kit</b>	Without	●	●	●	●	●	0	(b)
	With	□	□	□	□	□	F	
<b>Pre-Pressing conversion kit</b>	Without	●	●	●	●	●	0	(c)
	With	□	□	□	□	□	P	
<b>Mechanical agitation</b>	Without	●	●	●	●	●	0	(d)
	With	N/A	N/A	N/A	N/A	□	A	
<b>Storage rack</b>	Without	●	●	●	●	●	0	(e)
	With	□	□	□	□	□	C	
<b>Product contact materials</b>	AISI 304	●	●	●	●	●	4	(f)
	AISI 316	□	□	□	□	□	6	

● : by default on basic model | □ : available as an option

## Finishing Table Option:

- Dimple-jacket heating - vat bottom only.  
Maximum operating pressure: 70psi (water/ glycol)  
(may vary by state or province- please contact us to confirm)
- One (1) removable perforated wall with two (2) sliding supports

## Pre-Pressing Conversion Option:

- One (1) set of perforated bottom and pre-press plates
- Two (2) "C" channel supports for pressing the plates
- Pressing arches with two (2) cylinders each
- One (1) removable perforated wall with two (2) sliding supports
- One (1) flexible polypropylene drainage blind

The equipment dimensions may vary depending on the options taken; contact us for more information.

TPPH01 - (a) 20 (b) F (c) P (d) 0 (e) 0 (f) 4